

TEMPORARY

TEMPORARY LIFELINE



EN 795:2012 B+C
CEN/TS 16415:2013

- Temporary horizontal lifeline, easy to install
- 30 mm high-strength, high-visibility polyester webbing
- Number of users: 2 (1 each span)

MAXIMUM NUMBER
OF USERS



CODES AND DIMENSIONS


CODE	description	standard	pcs
TEMP20	temporary lifeline L = 20 m	EN 795:2012 B+C, CEN/TS 16415:2013	1

COMPLEMENTARY PRODUCTS

CODE	description	standard	pcs
OVALSTE	large carabiner	CE - EN 362/M	2

TECHNICAL DATA*

			EN 795:2012 B+C	CEN/TS 16415:2013
maximum users	no.			
users per span	no.			
minimum span	x_{min}	[m]	2	
maximum span	x_{max}	[m]	20	
minimum deflection	y_{min}	[m]	0,3	
maximum deflection	y_{max}	[m]	3	
total line length	L_{tot}	[m]	20	
minimum resistance on end elements	R_{min}	[kN]	21	

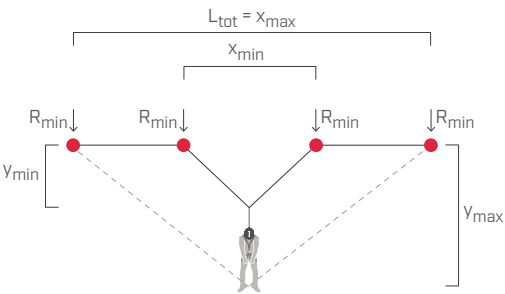

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

